


ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	2021-3-9	drawing release	kevin
	A1	2025-11-18	modify drawing	kevin

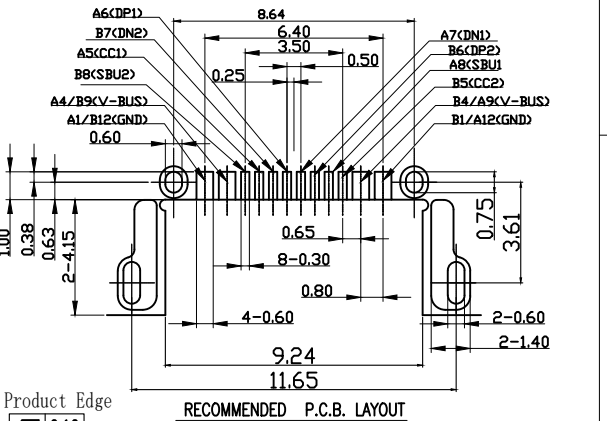

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
7	COVER SHELL	STAINLESS STEEL	Ni Plated	1PCS
6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

- NOTES:
SPECIFICATION:
- CURRENT RATING: 5.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES

LINEAR	ANGLE	NAME(INTENDED USE) TYPE C F
X. ±0.50	X°± 2°	PART NO.(INTENDED USE) UB16-81421A17
.X ±0.30	.X°± 1°	
.XX ±0.20	.XX°± 0.5°	
.XXX ±0.10		

GENERAL TOLERANCE UNLESS OTHERWISE NOTED

DR: yuanduo 11/18-25

APPD: CHKD: kevin.huang

东莞市全晟通精密制造有限公司
DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO.,LTD.

TITLE: CUSTOMER DRAWING
C F 单排16P 沉板0.80 CONN

DWG NO.: UB-0001

UNITS: mm SCALE: N/A SHEET: 1/1 REV: A1