


ECN NO.	版本	日期	变更内容	责任人
	AO	2021-11-1	新版本发行	黄文秋

NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
 - CONTACTS: COPPER ALLOY
 - MID PLATE: STAINLESS STEEL
 - FRONT SHELL: STAINLESS STEEL
 - EMI PLATE: STAINLESS STEEL
- PLATING SPECIFICATION:
 - CONTACTS:
 - NI 50u" MIN. UNDER PLATED OVER ALL.
 - AU PLATED ON THE FUNCTIONAL AREA OF CONTACT. (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - FRONT SHELL:
 - NI 30u" MIN. UNDER PLATED OVER ALL.
 - Sn 60u" MIN. PLATED OVER ALL.
 - EMI PLATE:
 - CLEAR ONLY
- MECHANICAL PERFORMANCE:
 - INSERTION FORCE: 0.5~2.0kgf.
 - REMOVAL FORCE: 0.8kgf~2.0kgf.
 - DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 5.0A VOLTAGE RATING: 5.0V
 - LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40mD/PIN MAX. SHIELD: 50mD/MAX. LLCR MAX. CHANGE OF ALL PINS: 10mD.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - DIELECTRIC WITHSTAND VOLTAGE: AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

LINEAR	ANGLE	NAME (INTENDED USE)	东莞市金晟通精密制造有限公司
X. ±0.50	X° ± 2'	TYPE C F	DONGGUAN QIAN SHENG TONG PRECISION MANUFACTURING CO.,LTD.
.X ±0.30	.X° ± 1'	PART NO. (INTENDED USE)	TITLE: CUSTOMER DRAWING
.XX ±0.20	.XX° ± 0.5'	UB24-81421016	C F 双排24P SMT 7.9长
.XXX ±0.10		APPD:	图号: UB24-0016
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		CHKD: DR: 黄文秋	单位: mm 比例: N/A 页次: 1/2 版本: AO
		DR: 黄文秋 2020-5-19	

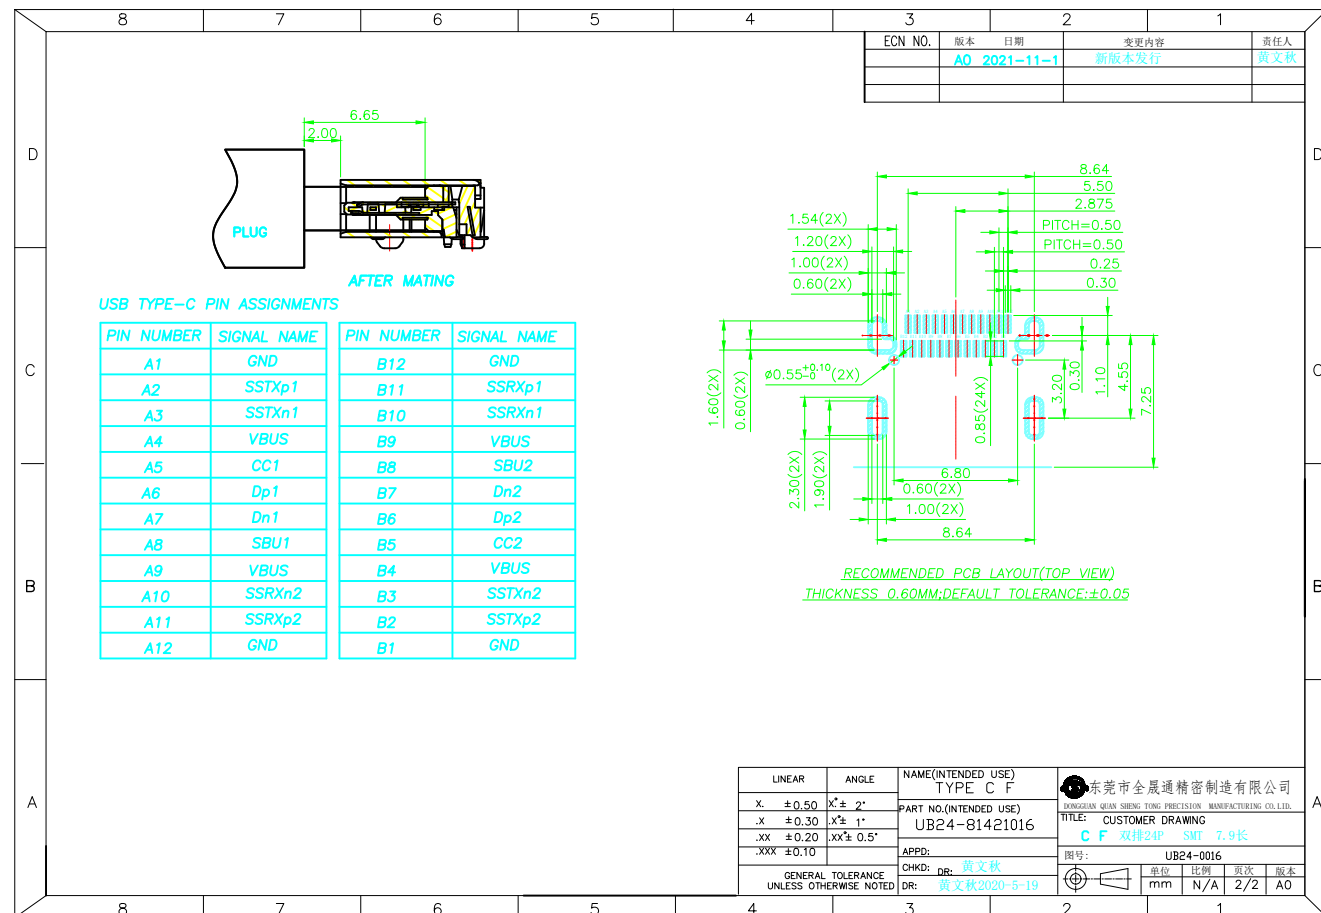

ECN NO.	版本	日期	变更内容	责任人
	AO	2021-11-1	新版本发行	黄文秋

LINEAR	ANGLE	NAME (INTENDED USE)	东莞市金晟通精密制造有限公司
X. ±0.50	X° ± 2'	TYPE C F	DONGGUAN QIAN SHENG TONG PRECISION MANUFACTURING CO.,LTD.
.X ±0.30	.X° ± 1'	PART NO. (INTENDED USE)	TITLE: CUSTOMER DRAWING
.XX ±0.20	.XX° ± 0.5'	UB24-81421016	C F 双排24P SMT 7.9长
.XXX ±0.10		APPD:	图号: UB24-0016
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		CHKD: DR: 黄文秋	单位: mm 比例: N/A 页次: 2/2 版本: AO
		DR: 黄文秋 2020-5-19	