




ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin



- 备注:
1. 材质:
 - 1.1 胶芯: LCP UL94V-0
 - 1.2 端子: 磷铜, 半金镍, 触点, 锡脚镀金 $1\mu\text{m}$.
 - 1.3 端子: SUS, 半金镍, 触点, 锡脚镀金 $1\mu\text{m}$
 2. 主要特性:
 - 2.1 额定电流: 0.5A
 - 2.2 接触阻抗: 50mΩ MAX
 - 2.3 绝缘阻抗: 100MΩ MIN 100V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度 $235 \pm 5^\circ\text{C}$, 时间 $5 \pm 0.5\text{s}$
 - 2.6 单PIN正向应力: 0.035kgf MIN
 - 2.7 使用寿命: 3000次
 - 2.8 耐温性: 烤箱测试: 温度 $250 \pm 5^\circ\text{C}$, 时间2分钟
 - 2.9 工作环境: 温度: $-30^\circ\text{C} \sim +80^\circ\text{C}$; 湿度: 80% MAX

D

D

C





C

B

B

A

A

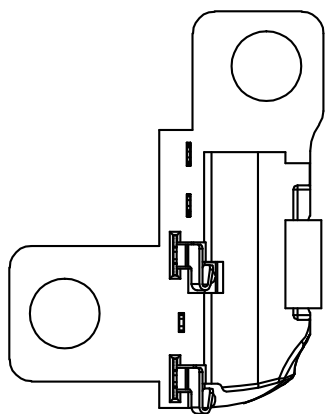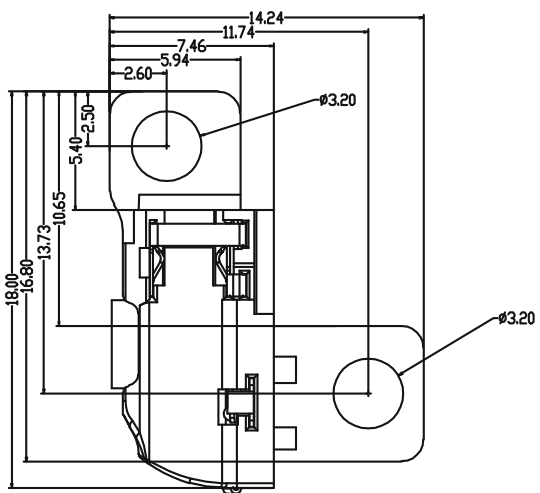

LINEAR	ANGLE	NAME(INTENDED USE) PHONE JACK	东莞市全晟通精密制造有限公司 DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO. LTD			
.X ± 0.25	$\pm 1^\circ$	PART NO.(INTENDED USE) PJ06-8142101	TITLE: CUSTOMER DRAWING PJ06-8142101-5P			
.XX ± 0.15		APPD:	DWG NO.:			
.XXX ± 0.05		CHKD:	UNITS mm SCALE N/A SHEET 1/1 REV. AO			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		DR:	3/9-16			

8

7

6

5

4

3

2

1