








ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin


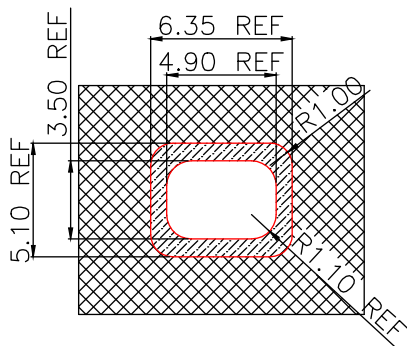


3D VIEW



- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 100 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;
- TERPROOF LEVEL: IPX7;

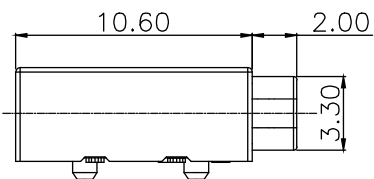


面板开孔参考尺寸

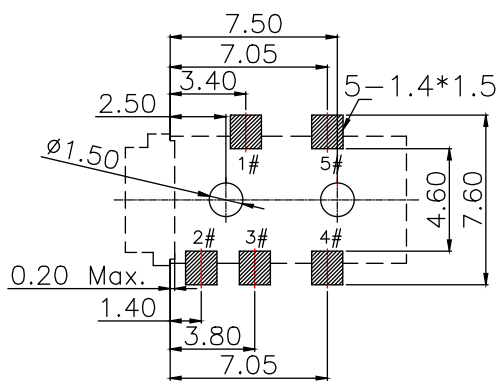

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)



Schematic



LINEAR	ANGLE	NAME(INTENDED USE) PHONE JACK	东莞市全晟通精密制造有限公司			
X.X ±0.30	X. ±2	PART NO.(INTENDED USE) PJ06-8142331	DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO. LID			
.XX ±0.20	.X ±1	APPD:	TITLE: CUSTOMER DRAWING PJ06-8142331			
.XXX ±0.10	.XX ±0.5	CHKD:	DWG NO.:			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		DR:	UNITS: mm SCALE: N/A SHEET: 1/1 REV: AO			
		3/9-16				