

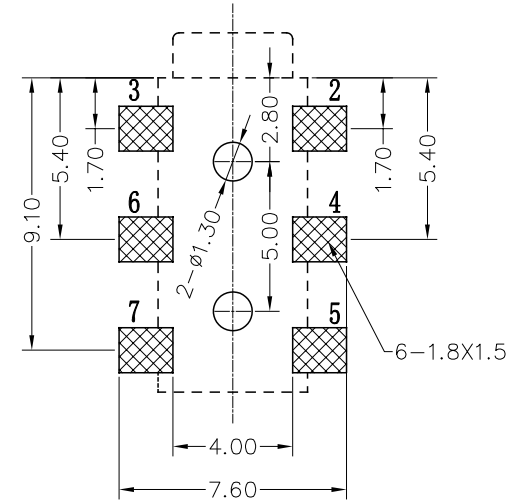

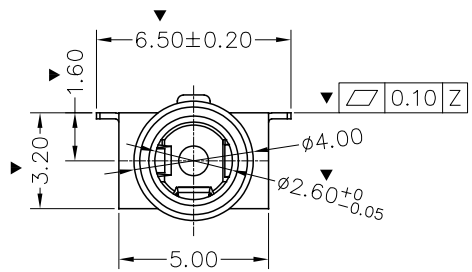

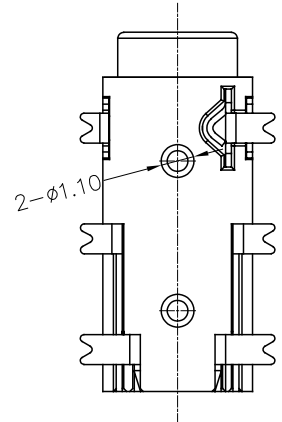
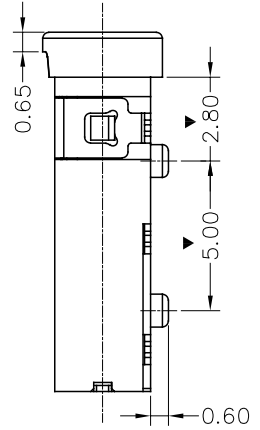




ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin

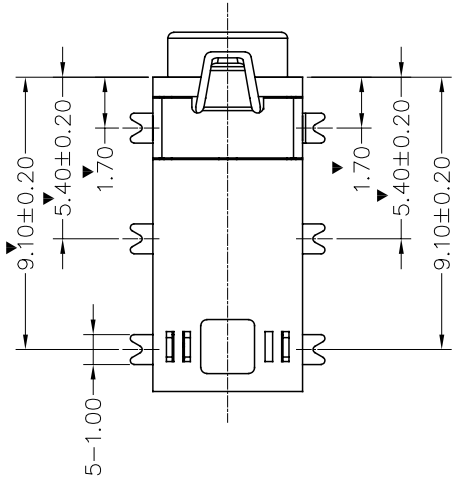

P.C.B LAYOUT TOP VIEW

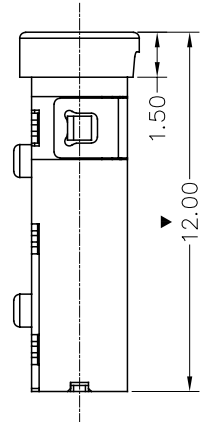

主要技术性能	
额定电负荷	DC 30V 10.5A
接触电阻	≤0.03 Ω
绝缘电阻	≥100MΩ
耐压	AC500V(50Hz)/min
插拔力	3-30N
使用温度范围	-30-70
使用寿命	5000次

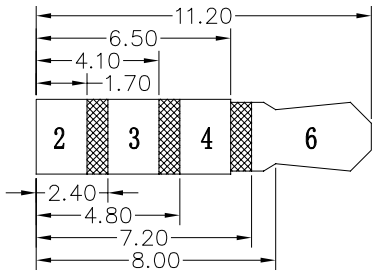

7	PJ06-8142342-07	4#开关脚	1	磷铜	0.2T	镀金
6	PJ06-8142342-06	4#脚	1	磷铜	0.2T	镀金
5	PJ06-8142342-05	3#开关脚	1	磷铜	0.2T	镀金
4	PJ06-8142342-04	3#脚	1	磷铜	0.2T	镀金
3	PJ06-8142342-03	2#脚	1	磷铜	0.2T	镀金
2	PJ06-8142342-02	盖脚	1	磷铜	0.2T	镀金
1	PJ06-8142342-01	底座	1	PPA		黑色
序号	产品编号	产品名称	数量	材料	规格	处理

LINEAR	ANGLE	NAME (INTENDED USE)
X. ±0.30	X. ±2°	PHONE JACK
.X ±0.20	.X ±1°	PART NO. (INTENDED USE)
.XX ±0.10	.XX ±0.5°	PJ06-8142342
.XXX ±0.05		APPD:
		CHKD:
		DR:
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		3/9-16

东莞市全晟通精密制造有限公司
 DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO. LTD
 TITLE: CUSTOMER DRAWING
 PJ06-8142342
 DWG NO.:

 UNITS: mm SCALE: N/A SHEET: 1/1 REV: AO