




ECN NO.	REV	DATE	DESCRIPTION	APP'D
	A0	20120325	drawing release	kevin


- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 1000Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;






3D VIEW

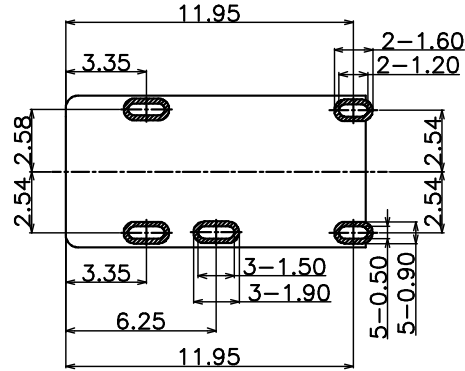


P.C.B. LAYOUT
TOP VIEW



SCHEMATIC

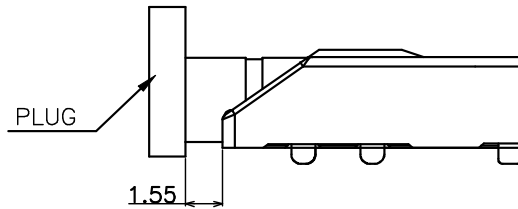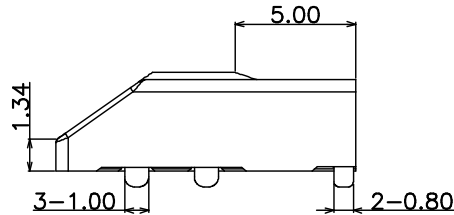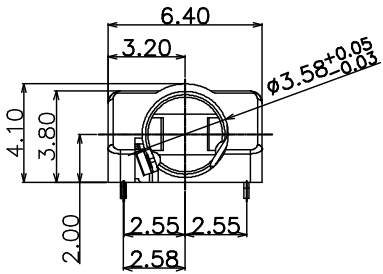

PLUG MATE DRAWING

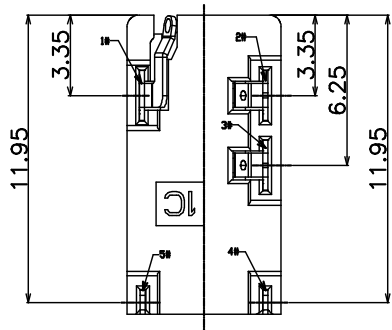

ITEM	NAME	QTY	DESCRIPTION
6	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
5	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
4	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
3	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
2	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
1	HOUSING	1	PPA COLOR BLACK

LINEAR	ANGLE	NAME(INTENDED USE) PHONE JACK
.X ±0.30	.X ±2.0°	PART NO.(INTENDED USE) PJ06-8142412
.X ±0.20	.X ±1.0°	APPD:
.XX ±0.10	.XX ±0.5°	CHKD:
.XXX ±0.05		DR:
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		

东莞市全晟通精密制造有限公司
DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO.LTD

TITLE: CUSTOMER DRAWING PJ06-8142412			
DWG NO.:			
	UNITS mm	SCALE N/A	SHEET 1/1
		REV. AO	

3/9-16