

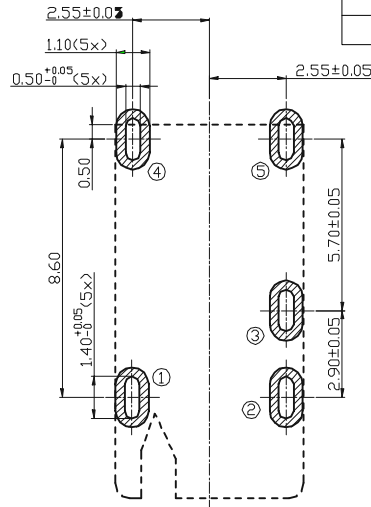
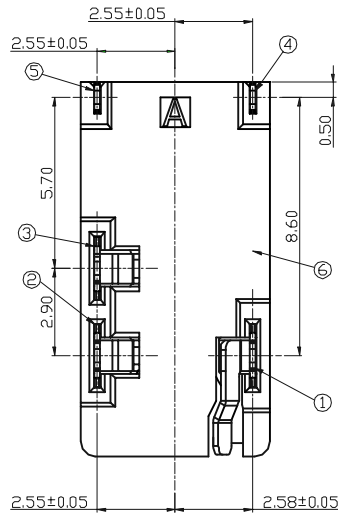
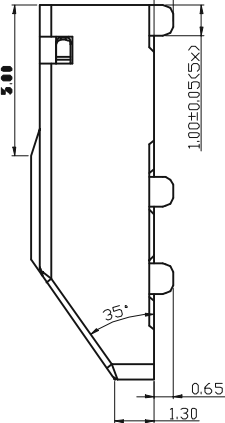
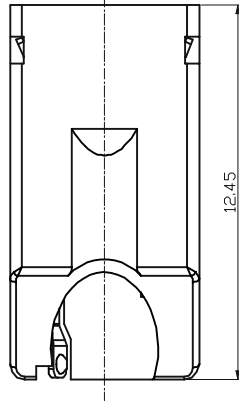

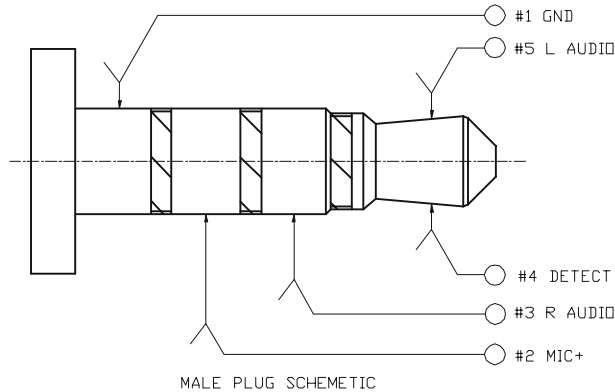
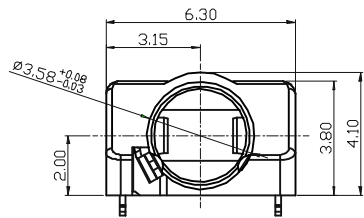


8	7	6	5	4	3	2	1	
ECN NO.			REV		DATE		DESCRIPTION	APP'D
			A0		20120325		drawing release	kevin



RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE:±0.05

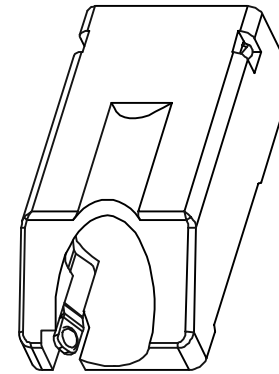

NOTES :

1.0) RATING :

- 1.1. VOLTAGE : 12 VDC (R.M.S.)
- 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
- 1.3. TEMPERATURE : -25°C TO +85°C

2.0) ELECTRICAL CHARACTERISTIC

- 2.1. CONTACT RESISTANCE : INITIAL 50m MAX. AFTER 100m
- 2.2. INSULATION RESISTANCE : 100 M MIN.
- 2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL

3.0) MECHANICAL :

- 3.1. DURABILITY ,MINUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL
- 3.2. INITIAL:MATING FORCE: 300g~2000g,UNMATING FORCE: 200g~2000g
- 3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g,UNMATING FORCE: 200g~2000g

5	HOUSING	THERMOPLASTIC,UL 94V-0,COLOR:BLACK	1		
5	CONTACT#5	COPPER ALLOY	G/F PLATING OVERALL 50U" MIN,NI UNDERPLATING	1	
4	CONTACT#4	COPPER ALLOY		1	
3	CONTACT#3	COPPER ALLOY		1	
2	CONTACT#2	COPPER ALLOY		1	
1	CONTACT#1	COPPER ALLOY		1	
ITEM	NAME	MATERIAL	FINISH	Q'TY	REMA

LINEAR	ANGLE	NAME(INTENDED USE) PHONE JACK	东莞市全晟通精密制造有限公司 DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO.LTD			
X. ±0.15		PART NO.(INTENDED USE) PJ06-8142553				
.X ±0.10		APPD:	TITLE: CUSTOMER DRAWING PJ06-8142553-5P			
.XX ±0.05		CHKD:	DWG NO.:			
.XXX ±0.03		DR:	3/9-16			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			UNITS mm SCALE N/A SHEET 1/1 REV. AO			