

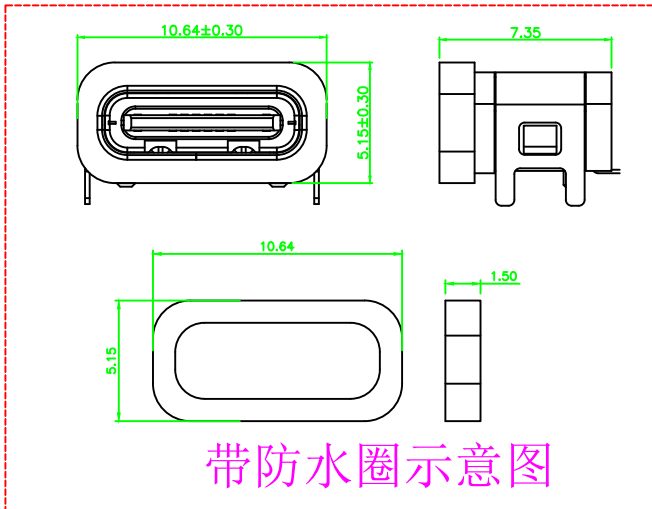

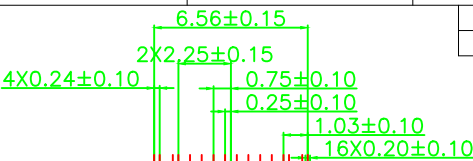
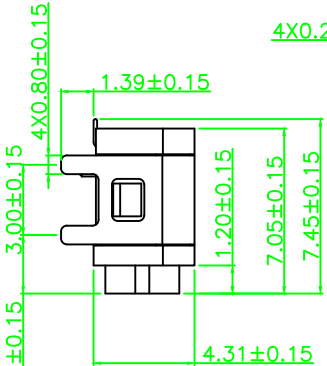

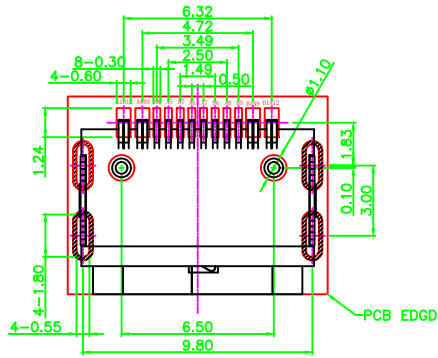



ECN NO.	REV	DATE	DESCRIPTION	APP'D
	AO	2020-5-19	drawing release	kevin



带防水圈示意图



PCB LAYOUT  
TOLERANCESIZE:±0.05



带防水圈3D

备注:

- 1.材质: LCP+30%G.F. UL94V-0 .黑色.
- 2.产品不可有缩水, 起泡、变形、划伤、缺胶、毛刺、刮伤端子等外观不良.
- 3.未标注C角为C0.15,毛边0.03MM MAX,功能区不可有毛边.
- 4.需实配判定贴板.
- 5.产品模穴号为沉胶凸字, 字体不可高出塑胶面
- 6.进胶点不能凸出塑胶平面、影响功能性毛边.
- 7.包装方式: REEL包装.

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

规格
SUS 301亮镍40u", 48H.
SHELL SUS 304 亮镍40u", 48H.
Molding LCP 黑色 C7025 镀金G/F"



LINEAR	ANGLE	NAME(INTENDED USE) TYPE C F
X. ±0.50	X°± 2°	PART NO.(INTENDED USE)
.X ±0.30	.X°± 1°	UB16-81421C25
.XX ±0.20	.XX°± 0.5°	APPD:
.XXX ±0.10		CHKD: kevin.huang
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		DR: kevin.huang 9/14-16

东莞市全晟通精密制造有限公司  
DONGGUAN QUAN SHENG TONG PRECISION MANUFACTURING CO.,LTD.

TITLE: CUSTOMER DRAWING  
TYPE C 16单排16P防水母座7.05

DWG NO.: UB-0025

UNITS	SCALE	SHEET	REV.
mm	N/A	1/1	A0